

ADVANTAGE[®]

COMMERCIAL LOCKS



HURRICANE
APPROVED HARDWARE

MIAMI-DADE COUNTY
APPROVED

Grade 1 F Series
Grade 2 E Series
Notice of Acceptance
(NOA) No. 15-0629.03
Air Infiltration rating +/- 90 PSF
Water Resistance rating +/- 90 PSF
Florida Building Code: 20485





Always Striving. philhardware.com **BHMA**
CERTIFIED™

F Series

CYLINDRICAL LEVERSET (CLUTCH)




500FC-CT
Charlotte (CT) Lever

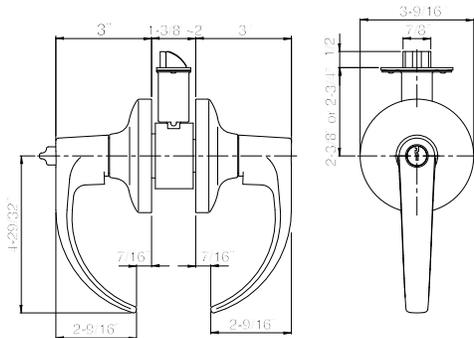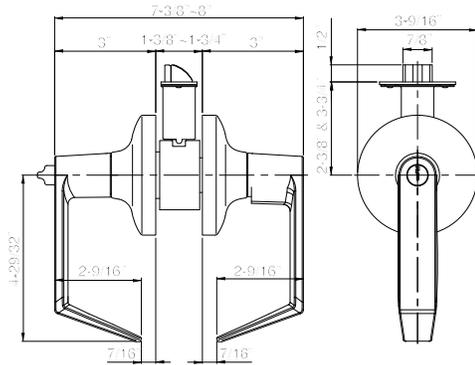

500FK-CT
Charlotte (CT) Lever



500FC-SD
San Diego (SD) Lever

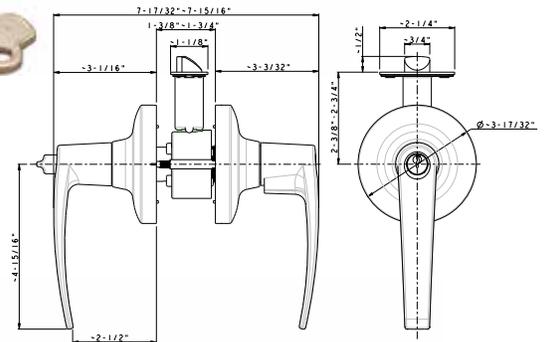

500FC-MD
Madison (MD) Lever

Features

- SC4 6-pin Standard
- Independent Torsion Springs
- Fast and Easy Installation
- Clutch Function Standard
- Removable Through Bolt, 2-3/4" CTC
- Panic Proof (inside always free)
- Concealed Mounting Screws

FC Series: Lock with standard cylinder or no cylinder

FK Series: Lock with interchangeable core design

FSE Series: Electrified - Failure Secure

ANSI GRADE 1 CLUTCH

LIFETIME Warranty

ANSI GRADE 1
ANSI/BHMA A156.2-2003
Series 4000, Grade 1
Exceeds 800,000 Cycles



3 Hours Fire Rating
UL10C/
UBC 7-2(1997)
Positive Pressure
Rated



ADA Compliant
ANSI A117.1
Barrier Free
Accessibility



NOA No. 15-0629.03 +/- 90 PSF
Florida Building Code: 20485

**CALIFORNIA STATE
REFERENCE CODE**
Formerly Title 19, California
State Fire Marshal (CSFM)
levers return to within
1/2" of door face
(CT & SD Lever Only)


Specifications

Door Fitting	1-3/8" ~ 2" door thick. Factory preset at 1-3/4". Thru-Bolt CTC: 2-3/4".
Exposed Trim	Wrought brass. Pressure cast zinc lever.
Lock Chassis	Heavy gauge dichromated steel. Zinc dichromated for corrosion resistance.
Cylinder	Solid brass SC4 6-pins standard. KW1 5-pins optional.
Latch	1/2" throw, 7/8" dia. stainless steel latch bolt. 1-1/8" x 2-1/4" faceplate. Floating latch design fits both flat or beveled doors 1/8" in 2".
Strike	ASA strike standard (9109). T-Strike optional (9106).
Handing	Universal, non-handing.
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
IC Core	FK Series, e.g. 500FK for Entrance. FSIC compatible with BEST profile 6-pins and 7-pins. LFIC (Schlage Profile) available for CT and SD levers.
Electrified	Model: 504FSE. Failure Secure Type, Input DC-12V/24V.


3/4" Throw Anti-Friction Latch



F9070T3
Dead latch for 2-3/4" backset
1-1/8" x 2-1/4" faceplate
For use fire rated pair of doors




Removable Through Bolt




* Note: Install w/o thru-bolts void
ANSI Grade 1, and warranty.

Adjustable Door Fitting




Floating Latch Design



Adjustable for flat or
beveled doors 1/8" in 2"

Door Preparation

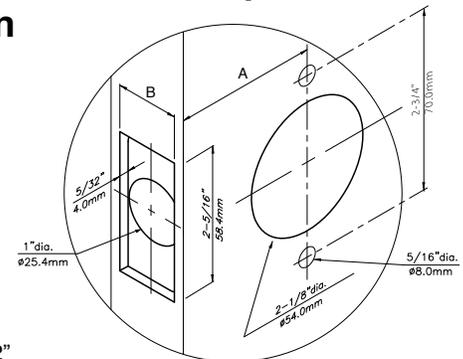

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-3/16"

Latch & Parts



F9060T
Dead Latch for 2-3/8" backset
F9070T
Dead Latch for 2-3/4" backset

521FC/FK Corridor Function Only
F9069T
Kick-off Dead Latch for 2-3/8" backset
F9079T
Kick-off Dead Latch for 2-3/4" backset



F9063T (kick-off)
Spring Latch for 2-3/8" backset
F9073T (kick-off)
Spring Latch for 2-3/4" backset



1214
5" backset
extension tube
(use with 2-3/4" backset latch)

1138
3-3/4" backset
extension tube
(use with 2-3/8" backset latch)

Strike




9109 ASA Strike
1-1/4" x 4-7/8",
5/8" lip

9106 T-Strike
1-1/8" x 2-3/4"



ES-50
Electric Strike

Thru-Bolt Jig (Metal)





9234
2-3/8" or 2-3/4" backset
Vertical CTC 2-3/4"

E Series CYLINDRICAL LEVERSET (CLUTCH)




500EV-CT
Charlotte (CT) Lever

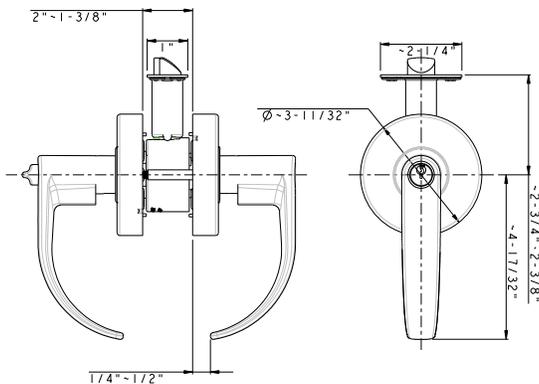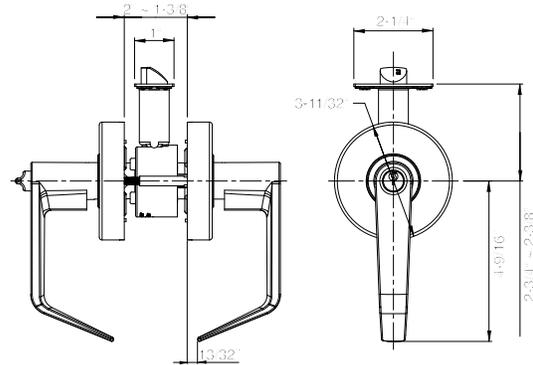

500EC-CT
Charlotte (CT) Lever



500EV-SD
San Diego (SD) Lever

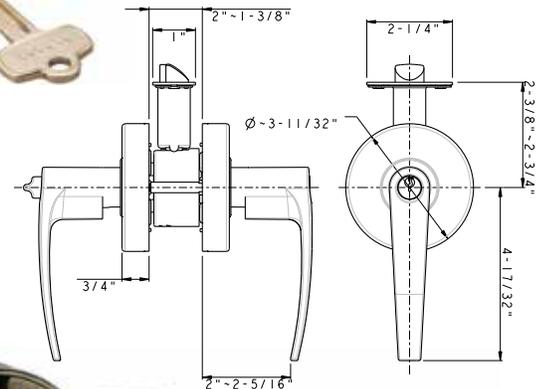

500EV-MD
Madison (MD) Lever

Features

- SC4 6-pin Standard
- Independent Torsion Spring
- Fast and Easy Installation
- Clutch Function Standard
- Removable Through Bolt, 2-3/4" CTC
- Panic Proof (inside always free)
- Concealed Mounting Screws

EV Series: Lock with standard cylinder or no cylinder

EC Series: Lock with interchangeable core design

ANSI GRADE 2 CLUTCH

LIFETIME Warranty

ANSI GRADE 2
ANSI/BHMA A156.2-2011
Series 4000, Grade 2
Exceeds 400,000 Cycles



3 Hours Fire Rating
UL10C/
UBC 7-2(1997)
Positive Pressure
LISTED Rated



ADA Compliant
ANSI A117.1
Barrier Free
Accessibility



**CALIFORNIA STATE
REFERENCE CODE**
Formerly Title 19, California
State Fire Marshal (CSFM)


NOA No. 15-0629.03 +/- 90 PSF
Florida Building Code: 20485

levers return to within
1/2" of door face
(CT & SD Lever Only)

Specifications


Door Fitting	1-3/8" ~ 2" door standard. Factory preset at 1-3/4". Thru-Bolt CTC: 2-3/4".
Exposed Trim	Wrought brass. Pressure cast zinc lever.
Lock Chassis	Heavy gauge dichromated steel. Featuring a solid zinc rosette, both interior and exterior for extra security.
Cylinder	Solid brass SC4 6-pins standard. KW1 5-pins optional.
Latch	1/2" throw stainless steel latch bolt. Square corner faceplate standard, round corner available. 2-3/4" backset: 1-1/8" x 2-1/4" faceplate. Optional for 1" width. 2-3/8" backset: 1" x 2-1/4" faceplate. Foating latch design fits both flat or beveled doors 1/8" in 2" Backset: 2-3/4" stanard, optional for 2-3/8", 3-3/4" & 5".
Strike	ASA Strike standard (9109).
Handing	Universal, non-handing.
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
IC Core	EC series, e.g. 500EC for Entrance. SFIC compatible with BEST profile 6-pins and 7-pins.

Removable Through Bolt




* Note: Install w/o thru-bolts void
ANSI Grade 2, and warranty.

Adjustable Door Fitting




Floating Latch Design



Adjustable for flat or
beveled doors 1/8" in 2"

Door Preparation

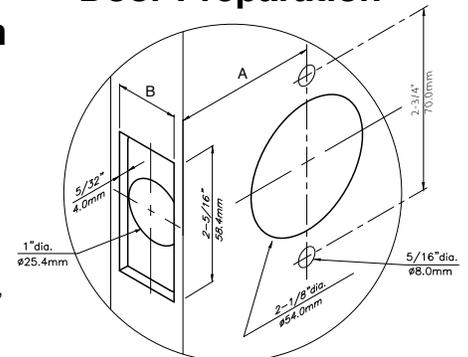

Latch & Parts



E9060T
Dead Latch for 2-3/8" backset




E9070T
Dead Latch for 2-3/4" backset

521EV/EC Corridor Function Only


E9069T
Kick-off Dead Latch for 2-3/8" backset
E9079T
Kick-off Dead Latch for 2-3/4" backset




E9063T (kick-off)
Spring Latch for 2-3/8" backset
E9073T (kick-off)
Spring Latch for 2-3/4" backset



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement



E9060C
Drive-in Dead. Latch for 2-3/8" backset



E9070C
Drive-in Dead. Latch for 2-3/4" backset



E9063C (kick-off)
Drive-in Spring. Latch for 2-3/8" backset
E9073C (kick-off)
Drive-in Spring. Latch for 2-3/4" backset



2214
5" backset
extension tube
(use with 2-3/4" backset latch)
2138
3-3/4" backset
extension tube
(use with 2-3/8" backset latch)

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

Strike



9109 ASA Strike
1-1/4" x 4-7/8",
5/8" lip




9106 T-Strike
1-1/8" x 2-3/4"

ES-50

Electric Strike



Thru-Bolt Jig (Metal)





9234
2-3/8" or 2-3/4" backset
Vertical CTC 2-3/4"

H Series


CYLINDRICAL LEVERSET (NON-CLUTCH)




500HV-CT
Charlotte (CT) Lever

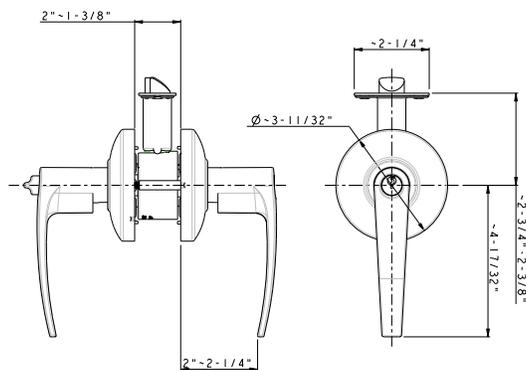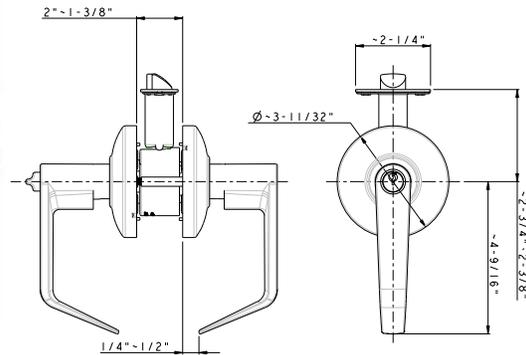

500HC-SD
San Diego (SD) Lever

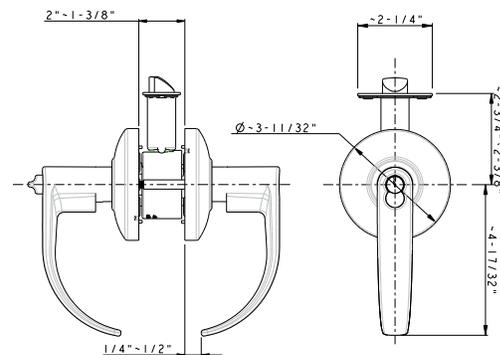

500HV-MD
Madison (MD) Lever

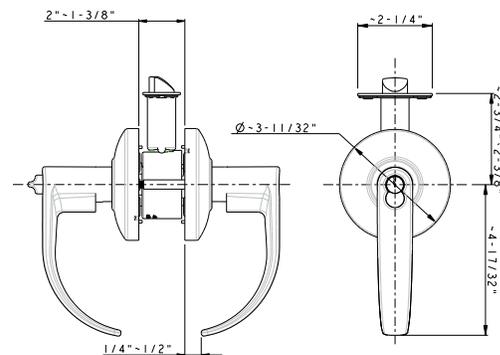

Features

- SC4 6-pin Standard
- Independent Torsion Spring
- Fast and Easy Installation
- Removable Through Bolt, 2-3/4" CTC
- Panic Proof (inside always free)
- Concealed Mounting Screws



500HC-CT
Charlotte (CT) Lever

HV Series: Lock with standard cylinder or no cylinder

HC Series: Lock with interchangeable core design

ANSI GRADE 2 NON-CLUTCH

LIFETIME Warranty

ANSI GRADE 2
ANSI/BHMA A156.2-2011
Series 4000, Grade 2
Exceeds 400,000 Cycles



LISTED

3 Hours Fire Rating
UL10C/
UBC 7-2(1997)
Positive Pressure
Rated



ADA Compliant
ANSI A117.1
Barrier Free
Accessibility


CALIFORNIA STATE REFERENCE CODE

Formerly Title 19,
California State Fire Marshal (CSFM)
levers return to within 1/2" of door face
(CT & SD Lever Only)

Specifications


Door Fitting	1-3/8" ~ 2" door standard. Factory preset at 1-3/4". Thru-Bolt CTC: 2-3/4".
Exposed Trim	Wrought brass. Pressure cast zinc lever.
Lock Chassis	Heavy gauge dichromated steel. Featuring a solid rosette, both interior and exterior for extra security.
Cylinder	SC4 6-pins standard. KW1 5-pins optional.
Latch	1/2" throw stainless steel latch bolt. Square corner faceplate standard, round corner available. 2-3/4" backset: 1-1/8" x 2-1/4" faceplate. Optional for 1" width. 2-3/8" backset: 1" x 2-1/4" faceplate. Floating latch design fits both flat or beveled doors 1/8" in 2".
Strike	ASA Strike standard (9109). Backset: 2-3/4" stanard, optional for 2-3/8", 3-3/4" & 5".
Handing	Universal, non-handing.
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
IC Core	HC series, e.g. 500HC for Entrance. SFIC compatible with BEST profile 6-pins and 7-pins.

Removable Through Bolt




* Note: Install w/o thru-bolts void
ANSI Grade 2, and warranty.

Adjustable Door Fitting




Floating Latch Design



Adjustable for flat or
beveled doors 1/8" in 2"

Door Preparation

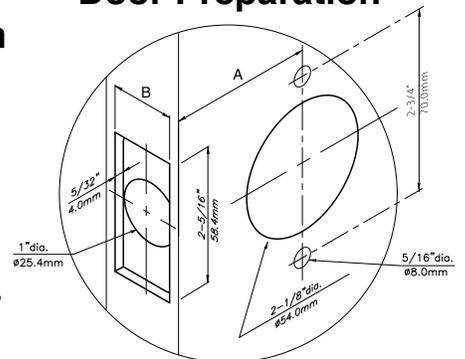

Latch & Parts




E9060T
Dead Latch for 2-3/8" backset
E9070T
Dead Latch for 2-3/4" backset




E9063T (kick-off)
Spring Latch for 2-3/8" backset
E9073T (kick-off)
Spring Latch for 2-3/4" backset



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement



E9060C
Drive-in Dead. Latch for 2-3/8" backset
E9070C
Drive-in Dead. Latch for 2-3/4" backset



E9063C (kick-off)
Drive-in Spring. Latch for 2-3/8" backset
E9073C (kick-off)
Drive-in Spring. Latch for 2-3/4" backset



2214
5" backset
extension tube
(use with 2-3/4" backset latch)



2138
3-3/4" backset
extension tube
(use with 2-3/8" backset latch)

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

Strike



9109 ASA Strike
1-1/4" x 4-7/8",
5/8" lip




ES-50
Electric Strike



9106 T-Strike
1-1/8" x 2-3/4"

Thru-Bolt Jig (Metal)



9234
2-3/8" or 2-3/4" backset
Vertical CTC 2-3/4"

EA Series CYLINDRICAL KNOBSET

ANSI GRADE 2

LIFETIME Warranty



ANSI GRADE 2
ANSI/BHMA A156.2-2011
Series 4000, Grade 2
Exceeds 400,000 Cycles




3 Hours Fire Rating
UL10C/UBC 7-2(1997)
Positive Pressure Rated


LISTED

Features

- SC4 6-pin Standard
- Concealed Mounting Screws
- 1 Piece Bulging High Security Knob
- Fast and Easy Installation
- Panic Proof (inside always free)

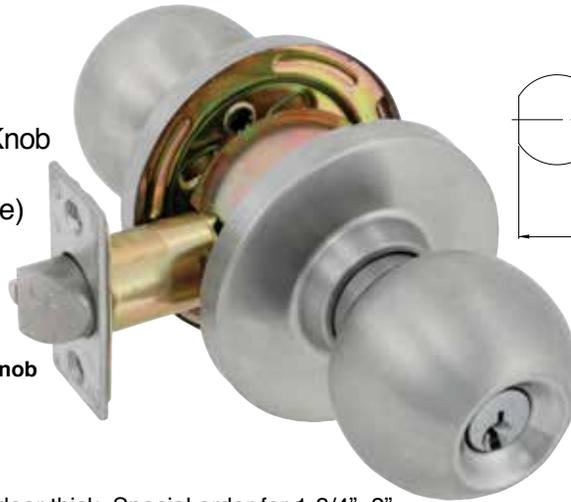

100EA-BA
Bala (BA) Knob

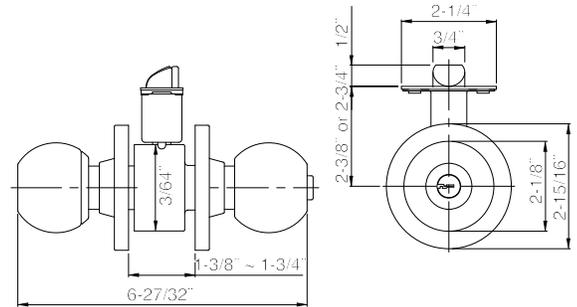

100EI-BA
Bala (BA) Knob
with IC Core

Specifications

Door Fitting	1-3/8" ~ 1-3/4" door thick. Special order for 1-3/4"~2".
Exposed Trim	Wrought brass or stainless steel.
Lock Chassis	Heavy gauge dichromated steel.
Cylinder	Solid brass SC4 6-pins standard. KW1 5-pins optional.
Latch	1/2" throw stainless steel latch bolt. Square corner faceplate standard, round corner available. 2-3/4" backset: 1" x 2-1/4" faceplate mortise latch with faceplate adapter. 2-3/8" backset: 1" x 2-1/4" faceplate mortise latch. Floating latch design fits both flat or beveled doors 1/8" in 2".
Strike	T-Strike standard (9106). ASA Strike optional (9109). Backset: 2-3/4" standard, optional for 2-3/8", 3-3/4" & 5".
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
IC Core	Model: 100EI-BA. SFIC compatible with BEST profile 6-pins and 7-pins.




Latch & Parts




E9060T
Dead Latch
for 2-3/8" backset




E9063T (kick-off)
Spring Latch
for 2-3/8" backset



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement



E9070T
Dead Latch
for 2-3/4" backset



E9073T (kick-off)
Spring Latch
for 2-3/4" backset



2214
5" backset
extension tube
(use with 2-3/4" backset latch)



2138
3-3/4" backset
extension tube
(use with 2-3/8" backset latch)

Strike



9109 ASA Strike
1-1/4" x 4-7/8",
5/8" lip




9106 T-Strike
1-1/8" x 2-3/4"



ES-50
Electric Strike



Door Preparation

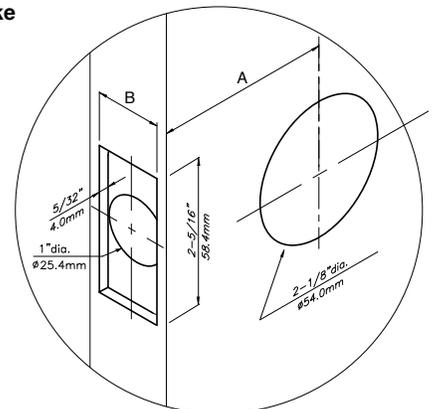

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

ADVANTAGE[®]
by PHILADELPHIA HARDWARE GROUP

RH Series TUBULAR LEVERSET

ANSI GRADE 2



ANSI GRADE 2
ANSI/BHMA A156.2-2003
Series 4000, Grade 2
Exceeds 400,000 Cycles



3 Hours Fire Rating
UL10C/UBC 7-2(1997)
Positive Pressure Rated



ADA Compliant
ANSI A117.1
Barrier Free
Accessibility

**CALIFORNIA STATE
REFERENCE CODE**
Formerly Title 19,
California State Fire Marshal (CSFM)
levers return to within 1/2" of door face
(CT & SD Lever Only)

Features


SC4 6-pin Standard
Concealed Mounting Screws
Reinforcing Barrel
Fast and Easy Installation
Panic Proof (inside always free)
Push Button for Entrance
and Privacy Function



500RH-CT
Charlotte (CT) Lever



500RH-SD
San Diego (SD) Lever

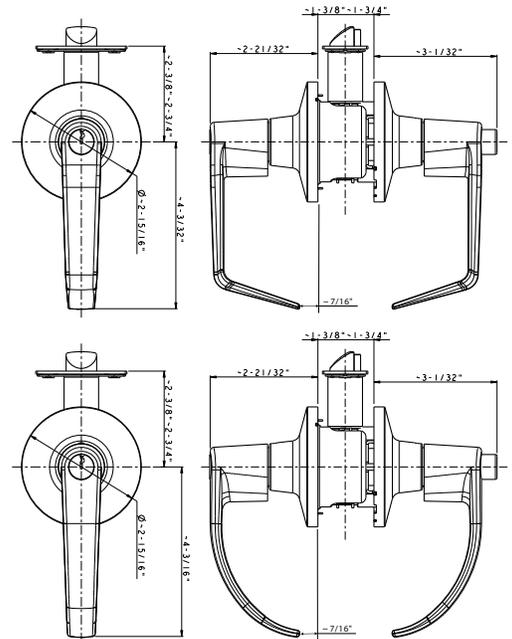

Specifications

Door Fitting	1-3/8" ~ 1-3/4" door thick. 2" available.
Lock Chassis	Heavy gauge dichromated steel. Zinc dichromated for corrosion resistance.
Exposed Trim	Wrought brass or stainless steel. Pressure cast zinc lever.
Cylinder	Solid brass SC4 6-pins standard. KW1 5-pins optional.
Latch	1/2" throw stainless steel latch bolt. 2-3/4" and 2-3/8" adjustable backset. 1" width square corner faceplate.
Strike	T-Strike standard (9106). ASA Strike optional (9109).
Handing	Universal, non-handing.
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).

Latch & Parts



T90A0T
Dead Latch Adustable
for 2-3/8" or 2-3/4" backset
D90A0
Dead latch drive in cap



T90A3T
Spring Latch Adustable
for 2-3/8" or 2-3/4" backset
D90A3
Spring latch drive in cap



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement

Strike



9109 ASA Strike
1-1/4" x 4-7/8",
5/8" lip




9106 T-Strike
1-1/8" x 2-3/4"

ES-50
Electric Strike



Door Preparation

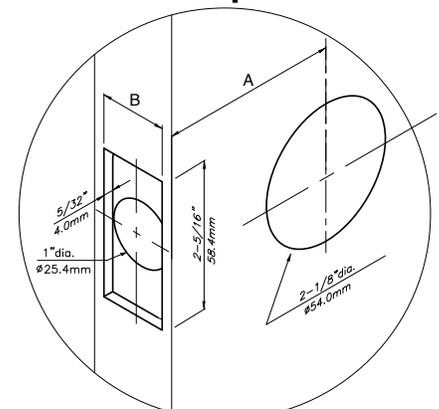

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-1/16"	1-1/16"

ADVANTAGE[®]
by PHILADELPHIA HARDWARE GROUP

* Use faceplate adapter (1180) when "B" size is 1-3/16"

LM Series DEADBOLT

ANSI GRADE 1

LIFETIME Warranty

ANSI GRADE 1
ANSI/BHMA A156.36 - 2010
Exceeds 250,000 Cycles



LISTED

3 Hours Fire Rating
UL10C/UBC 7-2(1997)
Positive Pressure Rated




ADA Thumbturn

Features

SC4 6-pin Standard
Concealed Mounting Screws
Fast and Easy Installation



200LM
Single Cylinder

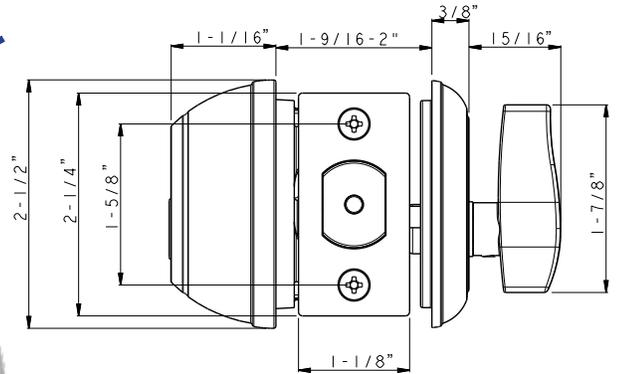

210LM
Double Cylinder

Specifications

Door Fitting	1-9/16" ~ 2" door thick. 2-1/4" available.
Exposed Trim	Solid forged brass.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
Cylinder	Solid brass SC4 6-pins standard with black powder metallurgy cylinder housing.
Latch	1" throw solid brass deadbolt latch with hardened steel rod insert. 2-3/4" backset: 1-1/8" x 2-1/4" faceplate mortise deadbolt latch (L9070TA). 2-3/8" backset: 1" x 2-1/4" faceplate mortise deadbolt latch (L9060TA).
Strike	Standard deadbolt strike (9121), and 1/8" wood frame reinforcer package (9221). ASA Deadbolt Strike optional (9109D).
Screws	Combination screws for both metal and wood doors.
Lock Chassis	Heavy gauge dichromated steel. Featuring a zinc security installation shield.
IC Core	SFIC compatible with BEST profile 6-pins and 7-pins. FSIC Schlage Profile IC Core.



200LM-IC



BEST IC



Schlage IC

Latch & Parts



L9060TA
Deadbolt Latch
for 2-3/8" backset



L9070TA
Deadbolt Latch
for 2-3/4" backset



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement

Strike



9109D ASA Deadbolt Strike
1-1/4" x 4-7/8"




9121 Deadbolt Strike
1-1/8" x 2-3/4"



9221 Wood Frame Reinforcer Package

- 1/8" thick wood frame reinforcer x 1
- 3" wood screws x 2
- strike box x 1

Door Preparation

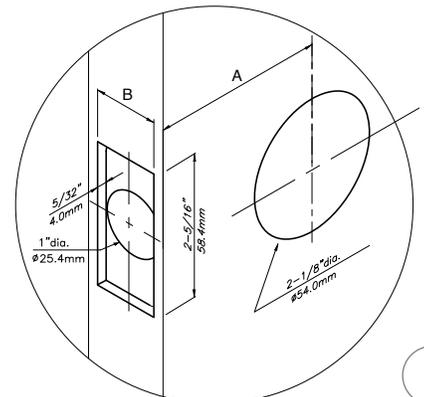

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

ADVANTAGE[®]
by PHILADELPHIA HARDWARE GROUP

LU Series DEADBOLT

ANSI GRADE 2

LIFETIME Warranty

ANSI GRADE 2
ANSI/BHMA A156.5-2001
Exceeds 150,000 Cycles



LISTED

3 Hours Fire Rating
UL10C/UBC 7-2(1997)
Positive Pressure Rated




ADA Thumbturn

Features


SC4 6-pin Standard
Fast and Easy Installation



200LU
Single Cylinder

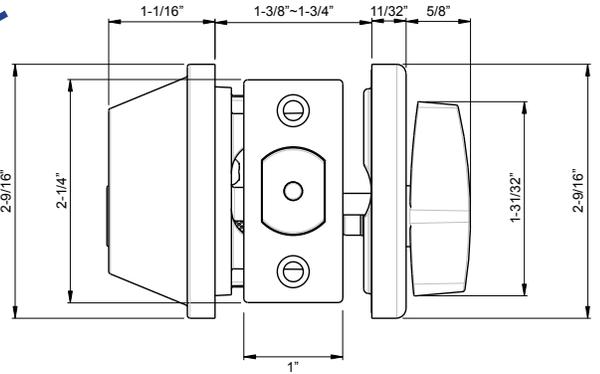

200LU-IC



220LU

Specifications

Door Fitting	1-3/8" ~ 1-3/4" door thick. 2" ~ 2-1/4" available.
Exposed Trim	Wrought brass or stainless steel.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
Cylinder	Solid brass SC4 6-pins standard with black powder metallurgy cylinder housing.
Latch	1" throw solid brass deadbolt latch with hardened steel rod insert. 1" x 2-1/4" faceplate adjustable mortise deadbolt latch (L90A0T) with faceplate adapter.
Strike	Standard deadbolt strike (9121), and 1/8" wood frame reinforcer package (9221). ASA Deadbolt Strike optional (9109D).
Screws	Combination screws for both metal and wood doors.
IC Core	Model: 200LU-IC. Door fitting: 1-5/8" ~ 2". SFIC compatible with BEST profile 6-pins and 7-pins.
Indicator	Model: 220LU

Latch & Parts



L90A0T
Adjustable **UL** Deadbolt Latch
for 2-3/8" and 2-3/4" backset



1180
Faceplate Adapter
Use on 1" width for
1-1/8" width requirement

Strike



9109D ASA Deadbolt Strike
1-1/4" x 4-7/8"




9121 Deadbolt Strike
1-1/8" x 2-3/4"



9221 Wood Frame Reinforcer Package

- 1/8" thick wood frame reinforcer x 1
- 3" wood screws x 2
- strike box x 1

Door Preparation

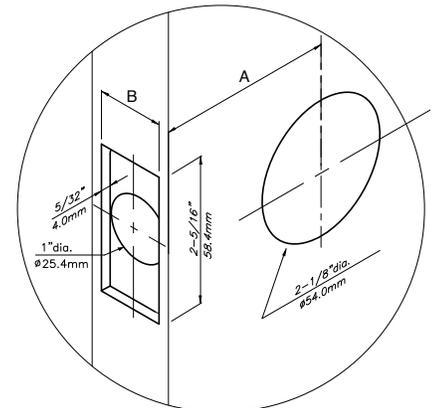

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

ADVANTAGE[®]
by PHILADELPHIA HARDWARE GROUP

IL Series

INTERCONNECTED LEVERSET

ANSI GRADE 2

LIFETIME Warranty

ANSI GRADE 2
ANSI/BHMA A156.12-2005
Series 5000, Grade 2
Exceeds 400,000 Cycles



LISTED


3 Hours Fire Rating
UL10C/UBC 7-2(1997)
Positive Pressure Rated




ADA Compliant
ANSI A117.1
Barrier Free
Accessibility

**CALIFORNIA STATE
REFERENCE CODE**

Formerly Title 19,
California State Fire Marshal (CSFM)
levers return to within 1/2" of door face
(CT & SD Lever Only)

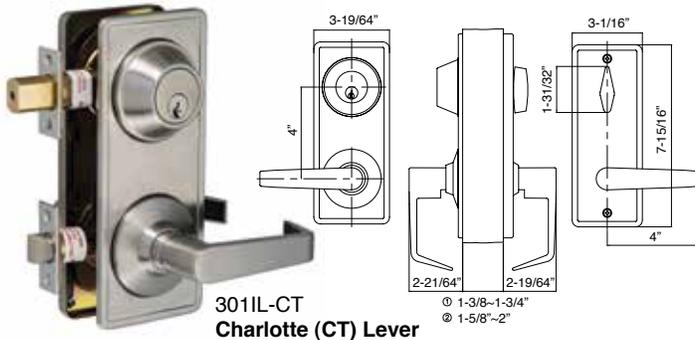

301IL-CT
Charlotte (CT) Lever

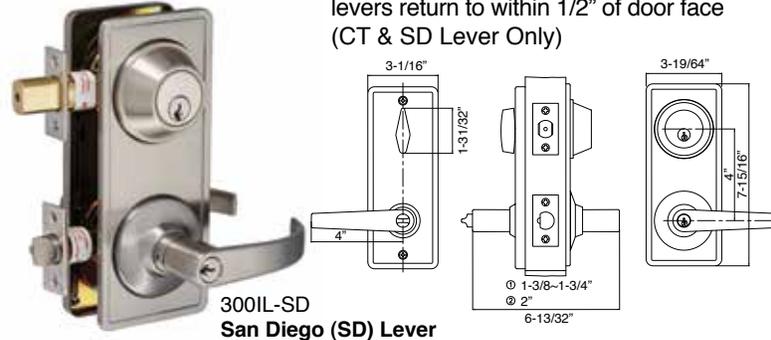

300IL-SD
San Diego (SD) Lever

Specifications

Door Fitting	1-3/8" ~ 1-3/4" door thick. 2" available. 4" center of deadbolt to center of lock chassis.
Exposed Trim	Wrought brass or stainless steel. Pressure cast zinc lever.
Lock Chassis	Heavy gauge dichromated steel with black powder metallurgy cylinder housing.
Cylinder	Solid brass SC4 6-pins standard. KW1 5-pins optional.
Latch	Deadbolt: 1" throw with hardened steel rod insert (L90A0T). 2-3/8" or 2-3/4" adjustable. Latch Bolt: 1/2" throw stainless steel latch bolt. 2-3/4" backset-1" x 2-1/4" faceplate mortise latch with faceplate adapter. 2-3/8" backset-1" x 2-1/4" faceplate mortise latch.
Strike	Deadbolt: Standard deadbolt strike (9111), and 1/8" wood frame reinforcer package (9221). Latch Bolt: T-Strike standard (9106).
Handing	Universal, non-handing.
Screws	Combination screws for both metal and wood doors.
Keys	2 brass keys per set. Key as requested (KA, KD, MCK, MK, GMK).
IC Core	Model: 301IL-IC. Door fitting: 1-5/8" ~ 2". SFIC compatible with BEST profile 6-pins and 7-pins.
Indicator	Model: 321IL Indicator with Passage Lever. Model: 320IL Indicator with Entrance Lever.



301IL F95
Entrance Single Locking



300IL F97
Entrance Double Locking




304IL F98
Storeroom Double Locking



321IL Indicator
Entrance Single Locking




Latch & Parts

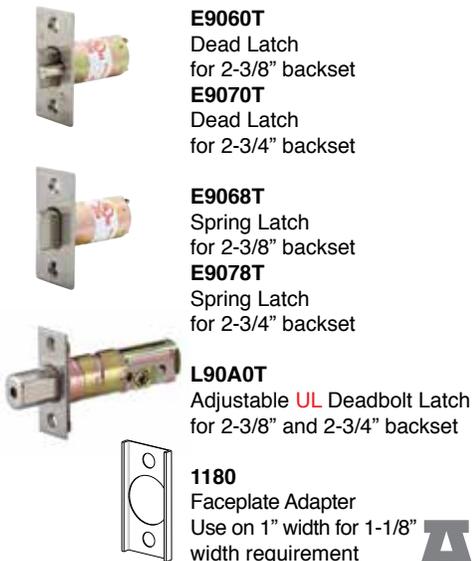

Strike



Door Preparation

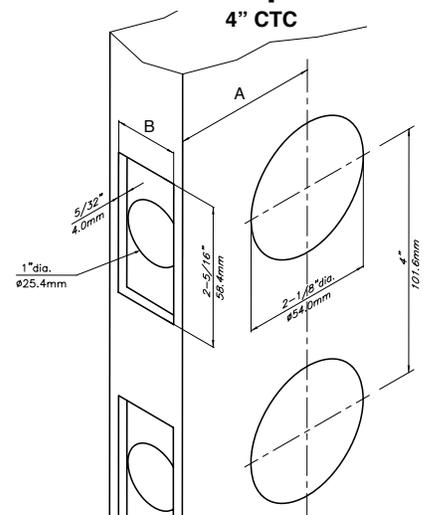

Backset	2-3/4"	2-3/8"
A	2-3/4"	2-3/8"
B	1-3/16"	1-1/16"

ADVANTAGE[®]
by PHILADELPHIA HARDWARE GROUP

CYLINDER, HOUSING & IC CORES

Mortise Cylinder & IC Cylinder Housing



Standard
for KW1/SC5/SC6



BEST SFIC
Mortise Housing
for 6 & 7pins



Schlage LFIC
Mortise Housing

Rim Cylinder & IC Rim Housing



Standard
for KW1/SC5/SC6



BEST SFIC
Rim Housing
for 6 & 7pins



Schlage LFIC
Rim Housing

Cylinder & IC Cores



Commercial Cylinder
Lever/Knob/Deadbolt
Schlage C & E Keyway




BEST A Keyway
6pins or 7pins



Schlage C & E Keyway
6pins

Keying System

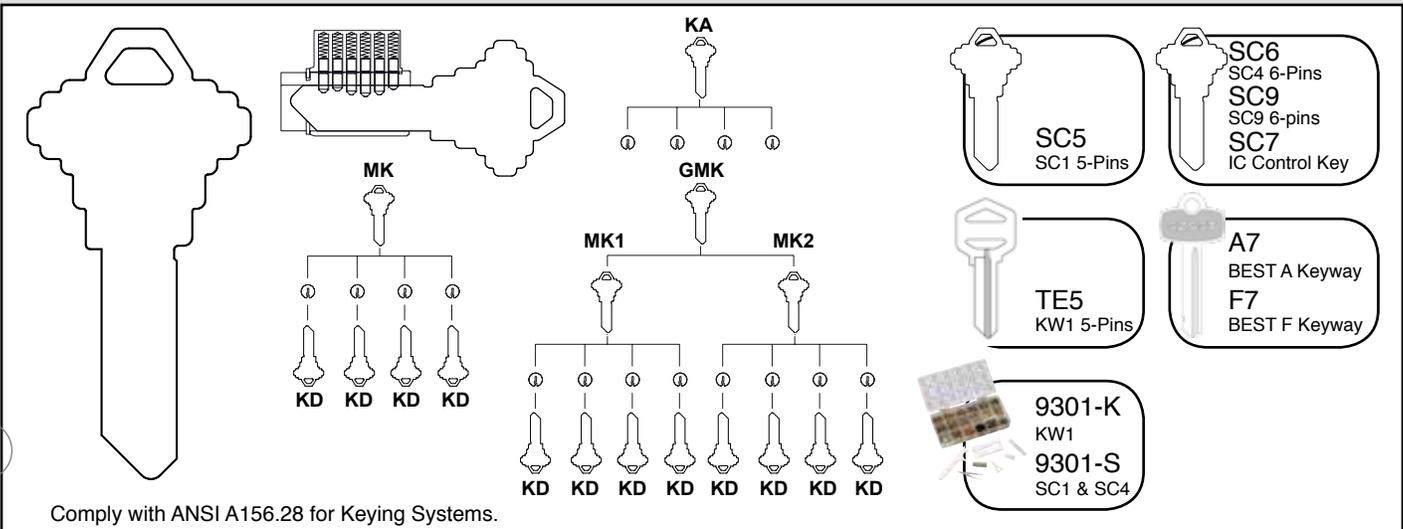

Keys & Keying Kits

Functions

LEVER, KNOB AND DEADBOLT



500/100 ENTRANCE (ANSI F109)

Pushing turn-button in inside lever locks outside lever. Turning inside lever or operating key in outside lever release button automatically. Closing door does not release button. Button is fixed in locked position by turning to horizontal position.



501/101 PASSAGE (ANSI F75)

Latch Bolt operated by lever or knob from either side at all times.



502/102 PRIVACY (ANSI F76)

Latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside, rotating inside lever, or closing door.



504/104 STOREROOM (ANSI F86)

Deadlocking latch bolt operated by key in outside lever or rotating inside lever. Outside lever is always locked.



506/106 PATIO (ANSI F77)

Operated by either side lever unless outside locked by push button inside. Unlocks by turning inside lever or closing door.



507/107 COMMUNICATING PASSAGE (ANSI F111)

Blank plate outside. Inside lever always unlocked.



508/108 STORE DOOR (ANSI F91)

Deadlocking latch operated by either lever. Key either locks or unlocks both levers.



509/109 CLASSROOM (ANSI F84)

Deadlocking latch bolt operated by key in outside lever or rotating inside lever. Outside lever locked or unlocked by key. Inside lever is always unlocked.



511/111 COMMUNICATING KEYED (ANSI F113)

Locked or unlocked by key from inside, blank trim outside. Dead locking latch bolt.



512 COMMUNICATING (ANSI F80)

Key locks or unlocks either lever independently of the other.



514/114 INSTITUTION (ANSI F87)

Both inside and outside lever always locked. Dead locking latch bolt operated by key on either side.



515/115 SINGLE DUMMY

Decorative trim that is non-functional.



517/117 ENTRANCE/OFFICE (ANSI F82)

Pushing button in inside lever locks outside lever. Turning inside lever or operating key in outside lever release button automatically. Closing door does not release button.



519 INTRUDER CLASSROOM (ANSI F110)

Both sides lock or unlock outside lever with key. Inside lever always unlocked.



521 CORRIDOR (ANSI F90)

Operated by either side lever unless outside locked by key or inside push button. Unlocked by key, turning inside lever, or closing door.



525 DOUBLE DUMMY

Decorative trim for both side of the door.



200 SINGLE CYLINDER (ANSI E0151, E0152)

Dead bolt operated by key from outside and by turn from inside.



205 ONE-SIDED HALF BORE (ANSI E0191, E0192)

Dead bolt operated by turn from inside. No trim on other side.



206 ONE-SIDED FULL BORE (ANSI E01111, E01112)

Dead bolt operated by key from one side. Mounting plate on other side.



210 DOUBLE CYLINDER (ANSI E0141, E0142)

Dead bolt operated by key from either side.



230 CLASSROOM DEADBOLT (ANSI E0171, E0172)

Deadbolt operated by key from outside. Turn knob retracts deadbolt but does not project it.

FUNCTIONS	ANSI	LEVER CODE	FC	FK	EV	HV	RH	IL	KNOB CODE	EA	EI	
Entrance	F109	500	●	●	●	●	● F82		100	●	●	
Passage	F75	501	●		●	●	●		101	●		
Privacy	F76	502	●		●	●	●		102	●		
Storeroom	F86	504	●	●	●	●	●		104	●	●	
Patio	F77	506	●						106	●		
Communicating Passage	F111	507	●		●	●	●		107	●		
Double Cylinder (Store Door)	F91	508	●	●	●	●	●		108	●		
Classroom	F84	509	●	●	●	●	●		109	●	●	
Communicating Keyed	F113	511	●	●	●	●	●		111	●	●	
Communicating	F80	512	●	●	●	●						
Institution (Double Storeroom)	F87	514	●	●	●	●			114	●		
Single Dummy		515	●		●	●	●		115	●		
Entrance/Office	F82	517	●	●	●	●			117	●	●	
Intruder Classroom	F110	519	●	●	●	●						
Corridor	F90	521	●	●	●	●						
Double Dummy (BTB Dummy)		525			●	●			125	●		
Entrance - Double Locking	F97	300						●				
Entrance - Single Locking	F95	301						● ●				
Storeroom - Double Locking	F98	304						●				
FUNCTIONS (Grade 1)	ANSI	CODE	LM	LM-IC	FUNCTIONS (Grade 2)				ANSI	CODE	LU	LU-IC
Single Cylinder Deadbolt	E0151	200	●	●	Single Cylinder Deadbolt	E0152	200	●	●			
Double Cylinder Deadbolt	E0141	210	●	●	Double Cylinder Deadbolt	E0142	210	●	●			
Classroom Deadbolt	E0171	230	●	●	Indicator Deadbolt		220	●				
One Way Deadbolt	E0161	240	●	●	Classroom Deadbolt	E0172	230	●	●			
One Sided - Half Bore	E0191	205	●	●	One Way Deadbolt	E0162	240	●				
					One Sided - Half Bore	E0192	205	●				
					One Sided - Full Bore	E01112	206	●				

● Products available in stock. Please see order information for details. ● Products available upon request. Please allow longer lead-time.

Order Information

SERIES	ITEM	IC CORE MODEL	FUNCTION	FINISH BHMA	US3 (605)	US26 (625)	US26D (626)	US10B (613)	US32D (630)
Grade 1 FC Charlotte (CT) San Diego (SD) Madison (MD) 	500FC	500FK	Entrance				●	●	
	501FC		Passage				●	●	
	502FC		Privacy				●	●	
	504FC	504FK	Storeroom				●	●	
	507FC		Communicating Passage				●	●	
	509FC	509FK	Classroom				●	●	
	515FC		Dummy				●	●	
	519FC	519FK	Intruder Classroom				●	●	
521FC	521FK	Corridor				●	●		
Grade 2 EV Charlotte (CT) San Diego (SD) Madison (MD) *US3, US26 is available in CT lever only 	500EV	500EC	Entrance		●	●	●	●	
	501EV		Passage		●	●	●	●	
	502EV		Privacy		●	●	●	●	
	504EV	504EC	Storeroom		●	●	●	●	
	507EV		Communicating Passage				●	●	
	508EV		Store Door				●	●	
	509EV	509EC	Classroom		●	●	●	●	
	514EV		Institution				●	●	
	515EV		Dummy		●	●	●	●	
	517EV		Office				●	●	
	521EV	521EC	Corridor				●	●	
	525EV		Double Dummy				●	●	
Grade 2 HV Charlotte (CT) San Diego (SD) Madison (MD)	500HV	500HC	Entrance				●	●	
	501HV		Passage				●	●	
	502HV		Privacy				●	●	
	504HV	504HC	Storeroom				●	●	
	507HV		Communicating Passage				●	●	
	509HV	509HC	Classroom				●	●	
	515HV		Dummy				●	●	
	517HV	517HC	Office				●	●	
525HV	Double Dummy					●	●		
Grade 2 RH Charlotte (CT) San Diego (SD)	500RH		Entrance				●	●	
	501RH		Passage				●	●	
	502RH		Privacy				●	●	
	504RH		Storeroom				●	●	
	509RH		Classroom				●	●	
	515RH		Dummy				●	●	
Grade 2 EA Bala (BA)	100EA	100EI	Entrance		●			●	●
	101EA		Entrance IC					●	●
	102EA		Passage		●			●	●
	104EA	104EI	Privacy		●			●	●
			Storeroom		●			●	●
			Storeroom IC					●	●
	108EA		Store Door		●			●	●
115EA		Dummy		●			●	●	
Grade 2 IL	300IL		Double Locking				●	●	
	301IL	301IL-IC	Single Locking		●		●	●	
	321IL		Indicator Passage				●	●	
	320IL		Indicator Entrance				●	●	
							●	●	
Grade 1 Commercial Deadbolt	200LM	200LM-IC	Single Cylinder				●	●	
	210LM	210LM-IC	Double Cylinder				●	●	
	230LM	230LM-IC	Classroom				●	●	
Grade 2 Commercial Deadbolt	200LU	200LU-IC	Single Cylinder		●	●	●	●	●
	206LU		Single Cylinder-IC				●	●	●
	210LU		One-Sided (Full Bore)				●	●	●
	220LU		Double Cylinder		●	●	●	●	●
	230LU		Indicator				●	●	●
		230LU-IC	Classroom		●	●	●	●	●
	240LU		Classroom-IC				●	●	●

● Product finishes available in stock. (Other finishes available upon request. Please allow longer lead time.)



DISTRIBUTION BY:



Philadelphia Hardware Group Inc.

SAN DIEGO DISTRIBUTION CENTER

(Home Office)
6590 Top Gun Street
San Diego, CA 92121
Tel: (858) 642-0450
Fax: (858) 642-0454
Toll Free Tel: 1-800-545-2309
Toll Free Fax: 1-800-828-0988
www.philihardware.com

CHICAGO DISTRIBUTION CENTER

3687 Darlene Court
Aurora, IL 60504
Toll Free Tel: 1-800-545-2309

ATLANTA DISTRIBUTION CENTER

2319 Defoor Hills Road N.W.
Atlanta, GA 30318
Toll Free Tel: 1-800-545-2309

DALLAS DISTRIBUTION CENTER

4653 Leston Avenue, Suite 703
Dallas, TX 75247
Toll Free Tel: 1-800-545-2309

