




RESIDENTIAL INTERIOR DOORS

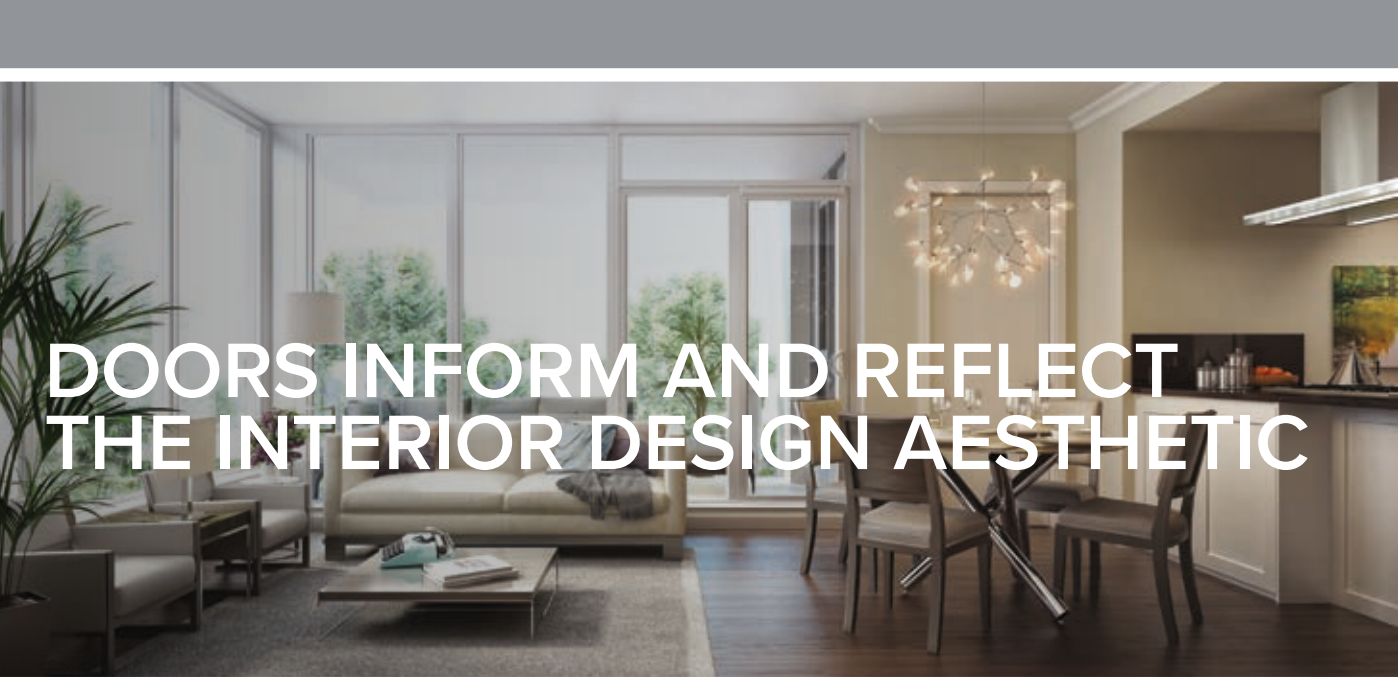

DOORS INFORM AND REFLECT THE INTERIOR DESIGN AESTHETIC

SINCE 1978 our business has been doors. Ownership and staff continue this legacy of consistency and the culture of quality found at Lynden Door.

Product quality is driven by the hands-on approach of senior management, technological innovation, and rigorous engineering values – often exceeding industry standards.

Lynden Door partners with members of the design and construction community committed to high standards of integrity, responsiveness and professionalism. Our distributors share our passion for service.

Open Your Future

Let Lynden Door be your guide to discovering interior doors as a design element. Our passion for innovation and design excellence, our environmentally intelligent choices and surprising affordability will ensure that interior doors play a central role in your design aesthetic.



BUILDING ON QUALITY

Lynden Door value proposition includes:

- Custom factory machining and finishing
- Wider top and bottom rails to allow trimming on site
- Pre-graded door faces to reduce field defects
- An extensive, blended product portfolio that includes architectural, commercial and residential doors
- Industry leading CARB Phase 2 green building products and environmental health choices. Our manufacturing facility in Lynden, WA is Forest Stewardship Council® (FSC®) FSC-C103189 Chain of Custody certified. Please ask about our FSC® certified products.
- Engineered to deliver peak performance and structural integrity at a competitive price – Lynden Door's consistent high value is an industry standard.
- Unique products and features developed through an intentional focus on real-world design and customer feedback.

All Lynden Door Residential products (SD Series) are available with either a hollow or solid core and carry a 1-year limited warranty. Select doors (solid core, 1-3/4" thick) may be ordered with a fire rating. Doors are also available for more demanding applications. Commercial doors (CD Series) come with a 5-year limited warranty, and Architectural doors (LD Series) have a lifetime limited warranty. Ask your Lynden Door representative about door edge options, specialized choices for green building, applied moldings, glazed units, factory finishing and custom machining. Inquire about STC sound ratings.

Due to the nature of real wood, each door surface will vary in woodgrain patterns, color and appearance, showcasing the beauty of real wood.

See www.lyndendoor.com for more information and photos.



VENEER

Lynden Door's wood veneer collection contributes beauty and warmth to any space



MAHOGANY
(LAUAN)



QUARTER SLICED
SAPELE



ROTARY
NATURAL BIRCH



UNIFORM
LIGHT BIRCH



ROTARY
WHITE MAPLE



PLAIN SLICED
RED OAK

Lynden Door's wood veneer doors provide the beauty and warmth of natural wood.

All doors are available with hollow or solid core construction and matching bifolds; 1-3/8" and 1-3/4" thick. All Lynden Door veneers are pre-graded before fabrication to ensure defect-free surfaces.

Lynden Door distributors can provide matching frames, hinges and casing for a completely integrated look. Contact your Lynden Door representative for information on fire rated and STC sound rated wood veneer doors.

ClearLine Factory Finish

A highly affordable, state of the art, ultra violet cured clear coat finish. Available on all veneer doors. No VOCs.



LDI MODERN

CREATIVE | CONCEPTUAL | CONTEMPORARY

STILELINE.

The excitement of **European styling** with an opposing grain in African Mahogany, White Maple, White Oak and Walnut. Create a bold, modern look at an attractive price.

Refer horizontal grain pair match requests to your Lynden Door representative before ordering.



AFRICAN
MAHOGANY



WHITE MAPLE



WHITE OAK



WALNUT

REDISCOVERY

The Rediscovery Collection provides contemporary and **custom expressions** in vertical grain, horizontal grain or sketchface designs.

Choose one of these designs or explore other species, custom patterns and finishes.



COMPOSITION
(SAPELE/MAPLE)



COMPOSITION
(MAPLE/SAPELE)


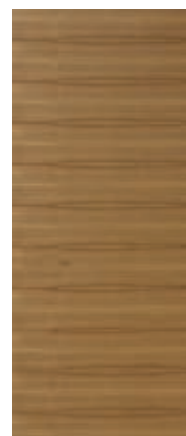



TABLEAU
(WALNUT)



RHYTMUS
(JATOBA)

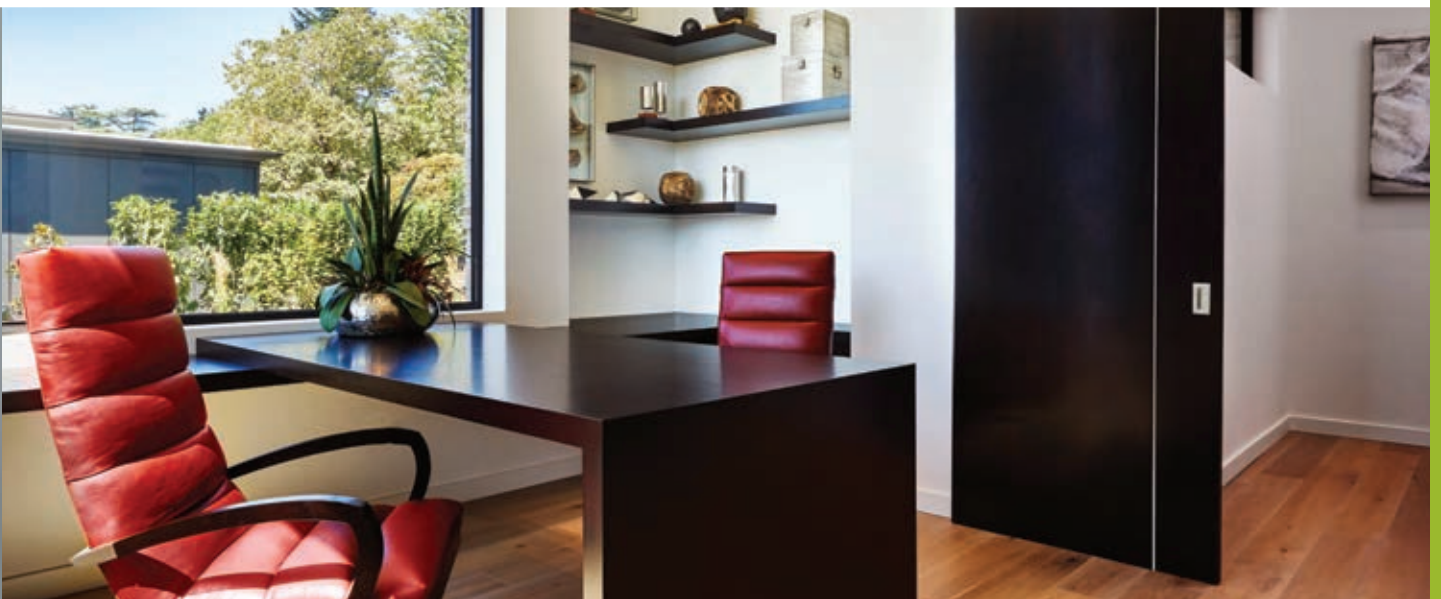

ROBSON

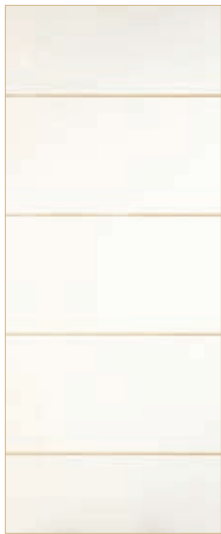

DENMAN



LAURELHURST



PARKROSE



ALKI



MONTLAKE

FINE | LINE

The FineLine collection is a **modernizing solution** to contemporary spaces, suitable for single family, multi-family and hospitality applications.

- Smooth, routed MDF surface
- Six standard profiles offered in 6'8", 7'0" and 8'0" heights and up to 4'0" in width - Custom sizes and designs are available
- Choose FineLine GA (groove alignment) for paired door applications
- Profile lines positioned to accommodate most hardware locations
- 1-3/8" and 1-3/4" thickness, hollow and solid core
- FineLine bi-folds available in the following profiles: Robson, Denman, Parkrose and Montlake.
- 20-minute fire rated (all sizes) and 45-minute fire rated (up to 3'0" x 7'0" single swing) available as Category A or Category B.

FACTORY FINISHED HARDBOARD

Hardboard doors offer great value at an affordable price

Hardboard doors offer great value at an affordable price. **Durable and stable**, Lynden Door Factory Finished Hardboard doors arrive ready to install with a professionally painted uniform finish that is UV cured and will keep doors attractive and easy to maintain. Lynden Door distributors can provide matching frames, hinges and casings for a completely integrated look.

Offered in a variety of finishes, covering the spectrum from light to dark and traditional to contemporary. Available in smooth, embossed and textured rift cut.

All doors are available with hollow or solid core construction and matching bifolds; 1-3/8" and 1-3/4" thick.

Contact your Lynden Door representative for information on fire rated and STC sound rated factory finished hardboard doors.



- NEW -
RIFT CUT SLATE
Textured



- NEW -
RIFT CUT
MEDIUM WALNUT
Textured



WESTERN HEMLOCK
Smooth




COASTAL HEMLOCK
Smooth



SPICED ASH
Smooth

800.631.DOOR (3667)

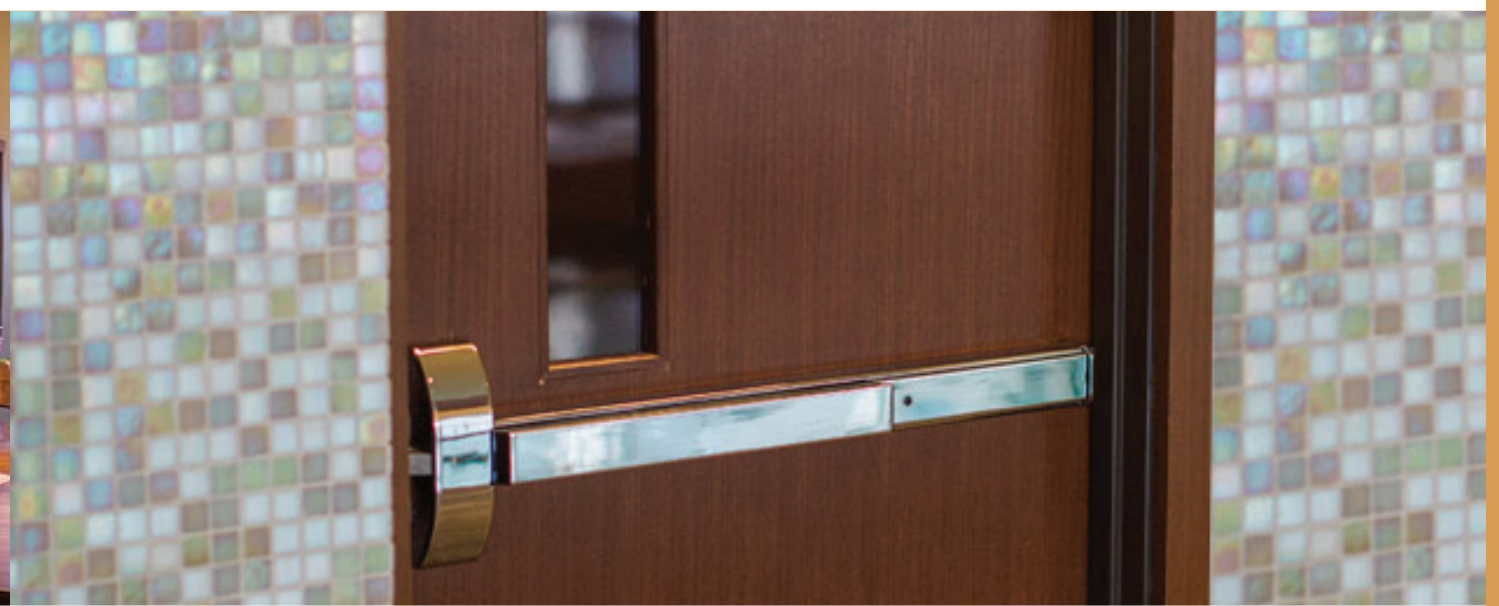

ALBANY MAPLE
Smooth



ALPINE OAK
Smooth




DRIFTWOOD
Smooth



STRAND OAK
Smooth



NEWPORT CHERRY
Smooth

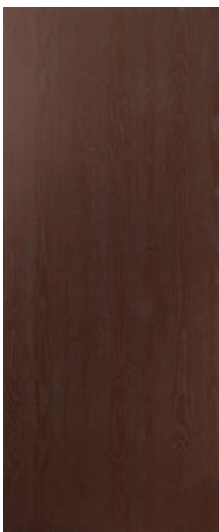

BEAUPORT WALNUT
Embossed



MENDOCINO OAK
Embossed



CHESAPEAKE
Embossed



WESTERN OAK
Embossed



GOLDEN OAK
(LIGHT)
Embossed

MOLDED HIGH DENSITY FIBERBOARD

Molded doors have become a major influence in the residential and light commercial built environment.

Lynden Door's molded doors are available with hollow or solid core construction and matching bifolds; 1-3/8" and 1-3/4" thick.
(Please consult the fold-out Sizing Chart.)

All Lynden Door molded panels are factory primed, pre-graded and acclimated before fabrication to produce top quality, stable surfaces. Molded door panels offer an ideal substrate for finish painting. Contact your Lynden Door representative for information on fire rated molded panel doors.

Molded doors have become a major influence in the residential and light commercial built environment. Why?

Stable Performance

No cracking or panel separation due to seasonal humidity changes.

Superior Value

Compelling design and customization opportunity at a significant value versus solid wood doors.



MADISON
Smooth | Flat Panel



WHITMAN
Smooth | Flat Panel



CRAFTSMAN
Smooth | Flat Panel



CARRARA
Smooth | Raised Panel



CAIMAN
Smooth | Raised Panel



CREMONA
Smooth | Raised Panel

800.631.DOOR (3667)



CONMORE
Smooth | Flat Panel



CLASSIQUE
Textured | Raised Panel



CLERMONT
Textured | Raised Panel



CARMELLE
Textured | Raised Panel



COLONIST
Textured | Raised Panel



CORVADO
Smooth | Raised Panel



CASHAL
Smooth | Raised Panel



COVENTRY
Smooth | Raised Panel



BENTON
Smooth | Raised Panel



COLONIST
Smooth | Raised Panel

VANAIR

VENTILATION | SOUND PRIVACY | AESTHETICS

Aesthetic Ventilation Design

Create **airflow pathways** without the complexity of modifying ceilings, walls and doors to accept ducts, vents and grilles.



Airflow Pathway

Air flows in from one side, through the door core and out the opposing side driven by pressure gradient.



Sound Privacy

Lab-tested baffling is incorporated into the door core to absorb high frequency sound.



Innovative Resonators

Resonator constructions are integrated into the door stile to absorb low frequency sound as it travels out of the airflow pathway.





Lynden Door introduces the VanAir door, a stylish and modern take on room to room ventilation without compromising sound control.

Airflow Performance (Cubic feet per minute at 2 Pa)*

VanAir	12" x 12" Grille	10" x 10" Straight Vent	1/2" Undercut
Up to 100 CFM	28 CFM	102 CFM	28 CFM

* Airflow performance based on configuration.
Contact your Lynden Door representative for more information.

Sound Transmission Class (STC)

	VanAir	Solid Core (1/2" Undercut)	Hollow Core (1/2" Undercut)
No Perimeter Seal	19 STC	15 STC	13 STC
Full Perimeter Seal	25 STC	18 STC	14 STC



GREENDOR™

Many Lynden Door products may be ordered with attributes from the GreenDor™ line. This supports green building under the following disciplines:


HEALTH – No VOC factory finishes, No Added urea-formaldehyde (NAUF) components, CARB compliance

RESOURCE CONSERVATION – Reduced timber construction

FOREST MANAGEMENT – Ensuring the wood in Lynden Doors comes from well managed forests

LEED™ – Leadership in Energy and Environmental Design

With a history of commitment to environmental stewardship, Lynden Door remains dedicated to meeting the requirements for sustainably responsible programs. GreenDor™ attributes may be applicable to LEED for Homes, the National Green Building Standard™, REGREEN, Green Globes and North American home builders association programs (such as Built Green™). Contact your Lynden Door representative to discuss options.

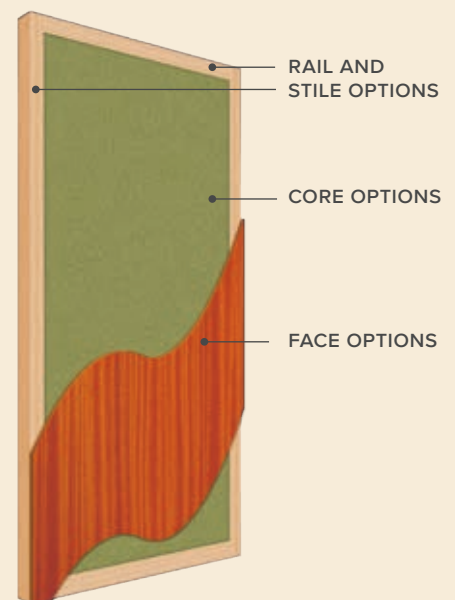

LYNDEN DOOR SIZING CHART - PRIMED MOLDED

PASSAGE DOORS															BIFOLD DOORS										
	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	1'6"	2'0"	2'4"	2'6"	2'8"	3'0"	4'0"	5'0"	5'4"	6'0"	
6'8" Primed Molded Skins																									
BENTON SMOOTH				2	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓
CAIMAN SMOOTH		2	✓	✓	3	✓	3	✓	✓	✓	✓	✓	✓	✓		✓		✓		✓	✓	✓			✓
CARMELLE TEXTURED					✓		3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CARRARA SMOOTH		2	✓	✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CASHAL SMOOTH				2	3	✓	3	✓	✓	✓	✓	✓	✓	✓		✓		✓		✓	✓	✓			✓
CLASSIQUE TEXTURED				✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓
CLERMONT TEXTURED				✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓
COLONIST SMOOTH		2	✓	✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
COLONIST TEXTURED		2	✓	✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CONMORE SMOOTH			2	3	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓		✓		✓	✓	✓			✓
CORVADO SMOOTH					3	✓	3	✓	✓	✓	✓	✓	✓	✓		✓		✓		✓	✓	✓			✓
COVENTRY SMOOTH		2	✓	✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CRAFTSMAN SMOOTH			2	3	✓	✓	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CREMONA SMOOTH				✓	✓	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓
MADISON SMOOTH			2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WHITMAN SMOOTH				3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓			✓	✓			✓
7'0" Primed Molded Skins																									
CAIMAN SMOOTH					✓	✓	3	✓	1	✓	✓	✓	✓	✓		1	1	✓	✓	✓	1	✓	✓	✓	✓
CARRARA SMOOTH					3	✓	3	✓	1	✓	✓	✓	✓	✓		1	1	✓	✓	1	1	✓	✓	✓	✓
CASHAL SMOOTH					1	1	3	✓	✓	✓	✓	✓	✓	✓		1		1	1	1	1	1	1	1	1
COLONIST SMOOTH					1		1,3	1	1	1	✓	1	1	✓		1	1	✓	1	✓	1	✓	1	✓	✓
COLONIST TEXTURED							1,3	1	1	1	1	1	1	✓		1	1	1	1	✓	1	1	1	1	✓
CONMORE SMOOTH					1,3	1	1,3	1	✓	✓	✓	✓	✓	✓		1		1	1	1	1	1	1	1	1
CORVADO SMOOTH					1	1	3	✓	✓	1	✓	✓	✓	✓		1	1	1	1	1	1	1	1	1	1
COVENTRY SMOOTH					3	✓	3	✓	✓	1	✓	1	1	✓		1	1	✓	✓	✓	1	✓	✓	✓	✓
CRAFTSMAN SMOOTH					1,3	1	✓	✓	✓	✓	✓	✓	✓	✓		1		1		1	1	1			1
CREMONA SMOOTH					1	1	1,3	1	1	1	✓	1	1	✓		1		1		1	1	1			1
MADISON SMOOTH					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		1	1	1	1	1	1	1	1	1	1
WHITMAN SMOOTH					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											
8'0" Primed Molded Skins																									
BENTON SMOOTH		2	2	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											
CAIMAN SMOOTH			2	2	3	✓	3	✓	✓	✓	✓	✓	✓	✓											
CARRARA SMOOTH				2	3	✓	3	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CASHAL SMOOTH			2	2	3	✓	3	✓	3	✓	✓	✓	✓	✓		1		1	1	1	1	1	1	1	1
COLONIST SMOOTH		1,3	1,3	1	1,3	1,3	3	✓	✓	✓	✓	✓	3	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
COLONIST TEXTURED							3	✓	3	✓	✓	✓	3	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
COVENTRY SMOOTH				2	3	✓	3	✓	✓	✓	✓	✓	3	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CREMONA SMOOTH		2	2	3	✓	✓	3	✓	3	✓	✓	✓	3	✓											
MADISON SMOOTH		3	3	✓	✓	1	3	✓	✓	✓	✓	✓	✓	✓				1	1	1		1	1	1	1
WHITMAN SMOOTH		2	2	3			3	✓	✓	✓	✓	✓	✓	✓											

✓ Stock item

1. Non-Stock: Available for Special Order

2. 2" Stile.
3. 3" Stile.

Note! Door Stiles are 3-5/8" or larger unless noted.

DOOR SIZING IS DIVIDED INTO TWO BASIC CATEGORIES: Molded Panel and Flush doors.

Molded Panel doors are available in a standard range of sizes, based on our ability to configure the molded panels – please consult the chart. Flush Doors include: veneer; StileLine® sketchface veneer and the Rediscovery Collection; factory finished hardwood; and plastic laminates (not shown in this brochure). Flush doors are not constrained by panel lay-out like Molded Panel doors and so flush doors are available in a great variety of sizes.

Flush door STANDARD RANGE: 1'0" to 4'0" in width, up to 8'0" in height. Custom sizing is optionally available beyond the standard sizes shown here, however some restrictions apply – please contact your Lynden Door representative for details.

Sizing Notes: Lynden Door distributors add significant value and convenience by maintaining large inventories of standard size doors. This helps competitive pricing and fast delivery. Custom sizing is a common service at Lynden Door and we thrive on accommodating your special needs at an affordable price. Customs are readily available but may affect price and delivery times – please contact your Lynden Door representative for details.

Lynden Doors are fabricated with wider top and bottom rails: 2" – 2-1/4" after trim. This allows for site trimming of doors up to 1" on each end without jeopardizing door strength. This allowance makes trimming for optimum fit a simple procedure and eliminates site measuring and special ordering.

Factory Finishing and Machining: ClearLine clear coat or Pacific Collection 7-color standard stain palette. In addition to custom sizing, factory finishing of veneer doors and machining services for all Lynden Door products are also optionally available to reduce site work and make fast-track projects run smoothly. Factory finishing gives your doors the advantage of precision surface preparation and a controlled application environment rather than the dusty, variable conditions typically found on a job site. In addition to enhancing appearance, factory finishing assures proper sealing of all surfaces to minimize moisture transfer and maintain structural stability and dimension. Both standard and custom factory finishes are available that exceed TR-6, AIA UV cured specifications. And Lynden Door factory finish is a healthful choice – it contains no VOCs, thus exceeding the requirements of SCAQMD* Rule 113 and complying with many green build standards for low emissions.

*South Coast Air Quality Management District. For further information on Lynden Door technical specifications, please contact your Lynden Door representative.

- Satin finish sheen
 - Non-flammable – does not support flame spread rating
 - Organic earthen pigments
- Doors may optionally be individually poly-bagged for protection
 - Ultra violet inhibitors to help slow wood aging and reduce photosensitive color change
 - Durable, cleanable, brilliant, architectural grade finished surfaces

Factory machining makes the most of Lynden Door's knowledge of core construction and internal blocking. Our familiarity with codes and thousands of repetitions on our CNC equipment makes factory machining precise and uniform.

Blended Offering: Lynden Door's unique product portfolio offers residential (SD), commercial (CD) and architectural (LD) doors all made in one facility. This blended offering allows us to meet the needs of even the most diverse specification as we can draw from the strengths of all three door series. Limited Warranties are SD – 1 year, CD – 5 years and LD – lifetime.



LYNDEN DOOR, INC.

2077 Main Street
Lynden, WA 98264

PHONE: 800.631.DOOR (3667)
360.354.5676

FAX: 360.354.3738

info@lyndendoor.com

www.lyndendoor.com



DEALER INFORMATION:

